


FOTS-P

Phase-stabilized fiber-optic system for microwave signal transmission

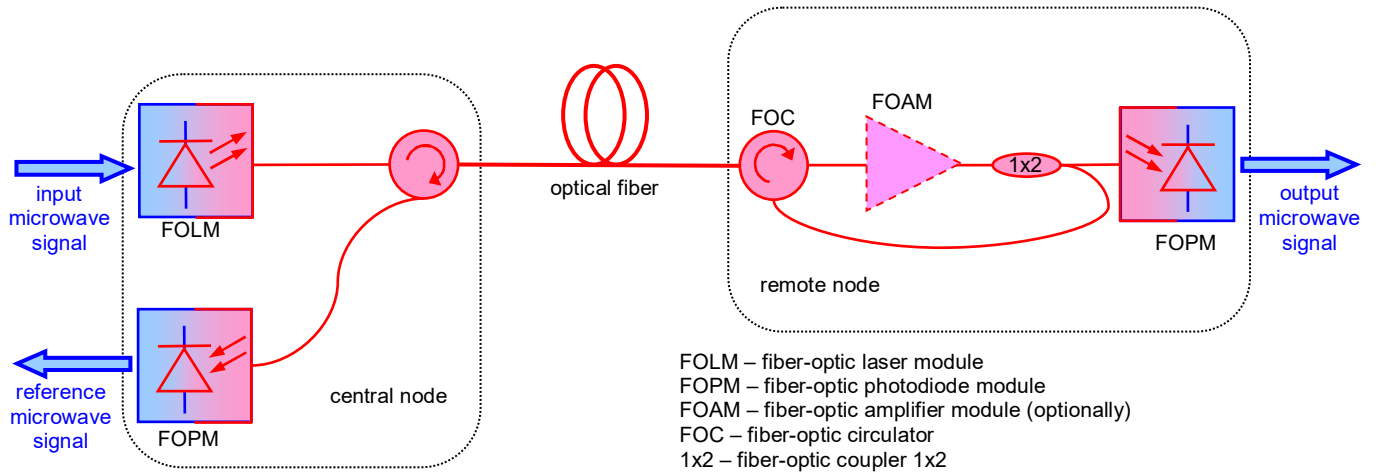

Main parameters:

- frequency range:
 - 0.1–10 GHz (based on FOLM-20, FOPM-10)
 - 0.1–40 GHz (based on FOLM-40, FOPM-40)
- phase stability of transmitted microwave signal (after correction): $< 0.2^\circ$
- maximal power of microwave signal: 10 mW

Time stability of the phase of transmitted microwave signal

